

48V/60V/72V to 12V 10A 120W DC-DC CONVERTER

Feature and Benefits

- Non-isolated
- Wide input voltage from 40V to 95V
- Stable output voltage is 12V
- 100% full rated power
- 100% burn-in test
- High efficiency up to 95%
- Cooling by free air convection
- Surface mountable
- 2-year warranty
- Ip68 waterproof, Epoxy potting Antivibabon,
- Dustproof
- Over current protection, Over voltage protection
- Over temperature protecton
- According to: EN 61000-6-3:2007/A1:2011/AC:2012
- EN 55014-1:2006/A2:2011 EN 60950-1:2006/AC:2011



Model	Input voltage range (Vdc)	Output voltage (Vdc)	Output current (A)	Output power max (W)	Ripple and noise type (mVp-p)	Efficiency (%)
BLA10-72-12	40-95	12	10	120	120	95

Note: All specifications measured at 25°C, nominal input voltage, and full load unless otherwise noted.

INPUT

Parameter	Test conditions or description	Min	Type	Max	Units
Operating input voltage		40	48/60/72	95	Vdc

OUTPUT

Parameter	Test conditions or description	Min	Type	Max	Units
Line regulation	Measured from high line to low line			±0.2	%
Load regulation	Measured from full load to zero load			±0.2	%
Voltage accuracy				±1.5	%
Adjust range		11.9	12	12.1	V
Temperature coefficient			±0.03		%/°C
No load current			≤ 0.01		A

Power Conversion Solutions from 1W to 200KW

BDC467-12V10A

48V/60V/72V to 12V 10A 120W DC-DC CONVERTER



OUTPUT

Parameter	Test conditions or description	Min	Type	Max	Units
Output over voltage protection	%Vo	115		140	%
Output short circuit protection	Continuous				
Current limit	% nominal output current	100	110	120	%
Thermal shutdown case temp			85		°C
Cooling	Free air convection				
Fuse	built in PCB		5		A


STANDARDS

Parameter	Test conditions or description
Safety approvals	EN 61000-6-3:2007/A1 :2011/AC:2012 EN 55014-1:2006/A2:2011 EN 60950-1:2006/AC:2011
Enclosures	IP68

ENVIRONMENTAL CONDITIONS

Parameter	Test conditions or description	Min	Type	Max	Units
Case operating temperature		-40	25	85	°C
Ambient temperature		-20		60	°C
Storage temperature		-40		105	°C
Humidity	Non-condensing			95	%

DERATING CURVE

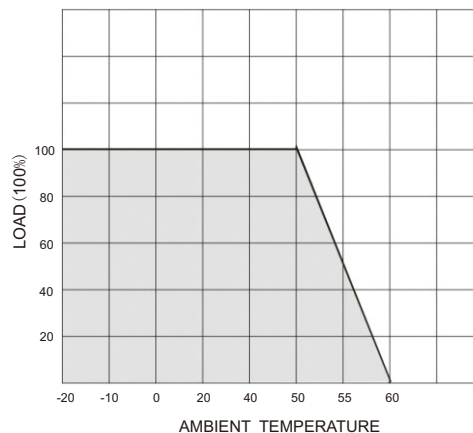

BDC467-12V10A

48V/60V/72V to 12V 10A 120W DC-DC CONVERTER



MECHANICAL DETAILS

Parameter	Test conditions or description
Dimensions (L x W x H)	74 x 74 x 31mm 2.91x2.91x1.22inch
Wire length	180mm/7.09inch
Case material	Aluminum
Net weight	280g/0.62lb
Package	1pcs/box, 50pcs/carton
Shipping dimensions	51*34.5*10.5cm/20.08*13.58*3.96inch
Shipping weight	14.9 kg/32.85lb

MECHANICAL DRAWING

